




Rotary Tiller

MF17



Rotary Tiller MF17

Technical Data

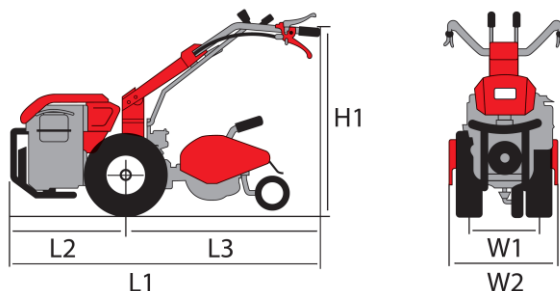

L1	2180
L2	730
L3	1450
H1	600-1300
W1	420-510
W2	600-900

Engine	
Lombardini	3LD510
Type	1 cyl. / 4-stroke diesel
Displacement	510 cm ³
Engine output	9,0 kW (12 HP)
Revolution speed	3000/rpm
Starter	Electric start
Air filter	oil-bath
Fuel filter	gauze and filter element

Clutch	Single, dry clutch friction disc
---------------	----------------------------------

Operational characteristics	
Weight (incl. tiller and tyres)	250 kg
Working speed: 4 forward and 1 reverse gears	
Tyres	6.50/80x12"
Brakes	with drum brakes (steering clutch brakes)
Steering bar	Steel tube bar on silent bearings 180° swivel height and side adjustment by hand
2 x PTO shaft	Standard PTO shaft with 2 speeds and independent PTO with reversing stop
Differential	with limited slip differential
Safety	Dead man's brake on steering bar
Extra	Trailer coupling and lights

Optional accessories:
- Ridge Plow 180°
- Tiller 80cm (Standard) (adjustable 60cm) ; Tiller 90cm (adjustable 70cm)
- Rotary Sweeper 100cm pivoting brush roller diameter 38cm
- Bar Mower kpl. 122cm incl. Quickfit / 1 set replacement blades
- Snow Blade 100cm
- Flail mower 65cm or 85cm
- Drum/Rotary Mower 80cm 4 x rotary blades
- Sickle Mower 70cm or 80 cm
- Rotary Harrow 84cm
- Stoneburier 64cm incl. rear roller in expanded metal, depth adjustment and automatic slip clutch
- Snow Blower 80cm discharge throwing distance 10-15m
- Trailer max. Payload 350kg, dimensions platform: 1240x950x300mm, tyres 145x70-8
- Trailer max. Payload 500kg, dimensions platform: 1370x1003x300mm, tyres 155 R 13

Authorised dealer:


PowerPac
Baumaschinen GmbH
 Niederhöchstädter Str. 71-73 D-61476 Kronberg
 Tel.: 0049-(0)6173-68558 Fax: 0049-(0)6173-68548
 E-Mail: info@powerpac.de Internet: www.powerpac.de