




Rotary Tiller

MF3



Rotary Tiller MF3



Technical Data

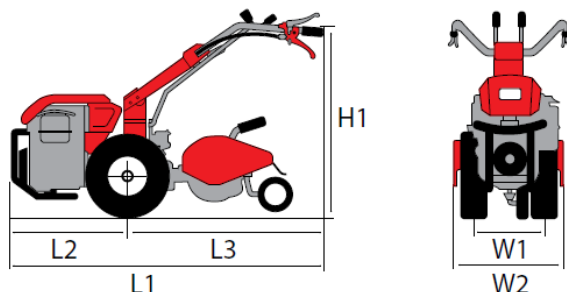

L1	1440
L2	470
L3	970
H1	230-1050
W1	380
W2	350-600

Engine	
Honda	GX160
Type	1 cyl. / 4-stroke petrol
Displacement	163 cm ³
Engine output	4,10 kW (5,5 HP)
Revolution speed	3600/rpm
Starter	reversing starter
Air filter	dry cell
Fuel filter	gauze

Clutch	Hand-Operated dry disc clutch
---------------	-------------------------------

Operational characteristics	
Weight (incl. tiller and tyres)	80 kg
Working speed: 1 forward and 1 reverse gear	1.18   3.07
Tyres	Pneumatic tyres 4.00-8"
Steering bar	Steel tube bar on silent bearings 180° swivel height and side adjustment by hand
Safety:	Dead man`s brake on steering bar

Optional accessories:

- Ridge Plow incl. Adapter
- Tiller 50cm (adjustable 35cm)
- Tiller 60cm (Standard) (adjustable 50-35cm)
- Snow blade 80cm
- Rotary Sweeper 80cm
- Bar Mower kpl. 87cm or 97cm incl. runners
- Bar Mower kpl. 122cm incl. 1 set replacement blades
- Sickle Mower 55cm
- Snow Blower 50cm discharge throwing distance 10-15m

Authorised dealer:



Baumaschinen GmbH

Niederh ochst adter Str. 71-73 D-61476 Kronberg
Tel.: 0049-(0)6173-68558 Fax: 0049-(0)6173-68548
E-Mail: info@powerpac.de Internet: www.powerpac.de