





Rotary Tiller

MF5



Rotary Tiller MF5

Technical Data

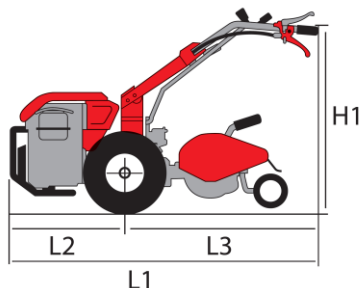

L1	1800
L2	690
L3	1110
H1	1470-630
W1	370
W2	800-400

Engine	
Honda	GX270
Type	1 cyl. / 4-stroke petrol
Displacement	270 cm ³
Engine output	6,6 kW (9 HP)
Revolution speed	3600/rpm
Starter	reversing starter
Air filter	dry cell
Fuel filter	gauze

Clutch	Hand-Operated dry disc clutch
---------------	-------------------------------

Operational characteristics	
Weight (incl. tiller and tyres)	130 kg
Working speed:	1.26 1 1R 1.33
3 forward and 3 reverse gears	2.64 2 2R 2.79
EN 709 Norm	4.37 3 3R 4.62
Tyres	AS Tyres 5.00-10"
Transmission	Reverse gear unit with easy shift gears
Steering bar	Steel tube bar on silent bearings 180° swivel height and side adjustment by hand
PTO	Transmission independent PTO with reversing stop
Differential	with limited slip differential
Safety	Dead man's brake on steering bar
Extra	Trailer coupling

Optional accessories:

- Ridge Plow 180°
- Grubber 1mtr. / 1,3mtr.
- Tiller 60cm (adjustable 50-35cm) ; Tiller 65cm (adjustable 57-44-35cm) ; Tiller 70cm (Standard) (adjustable 58-48-40cm)
- Snow Blade 80cm or 100cm
- Rotary Sweeper 100cm pivoting brush roller diameter 38cm
- Bar Mower kpl. 87cm or 97cm incl. runners
- Bar Mower kpl. 122cm inkl. 1 set replacement blades
- Drum/Rotary Mower 70cm 2 x rotary blades
- Sickle Mower 70cm
- Flail mower 65cm
- Snow Blower 60cm discharge throwing distance 10-15m
- Trailer max. Payload 350kg, dimensions platform: 1240x950x300mm, tyres 145x70-8
- Trailer max. Payload 500kg, dimensions platform: 1370x1003x300mm, tyres 155 R 13

Authorised dealer:



PowerPac
Baumaschinen GmbH

Niederhöchstädter Str. 71-73 D-61476 Kronberg
Tel.: 0049-(0)6173-68558 Fax: 0049-(0)6173-68548
E-Mail: info@powerpac.de Internet: www.powerpac.de